



# GM01P4SP

## EMERGENCY STATION WITH PUSH BUTTON Ø 40 MM PUSH-PULL VISION WITH PROTECTION

Material	thermoplastic
Protection class	IP65
Operating temperature	-25°C ... +70°C
Storage temperature	-30°C ... +70°C
Knockout	M16 / M20

1 NC contact block (spring contacts)		
1 NO contact block (spring contacts)		
Rated insulation voltage	Ui	690 V *
Rated impulse withstand voltage	Uimp	4 kV *
Frequency		50/60 Hz *
Rated thermal current	Ith	16 A *
Rated operating current	Ithe	10 A
Marking	CE, IMQ, RINA, EAC, CCC, UL	

\* IMQ approved values

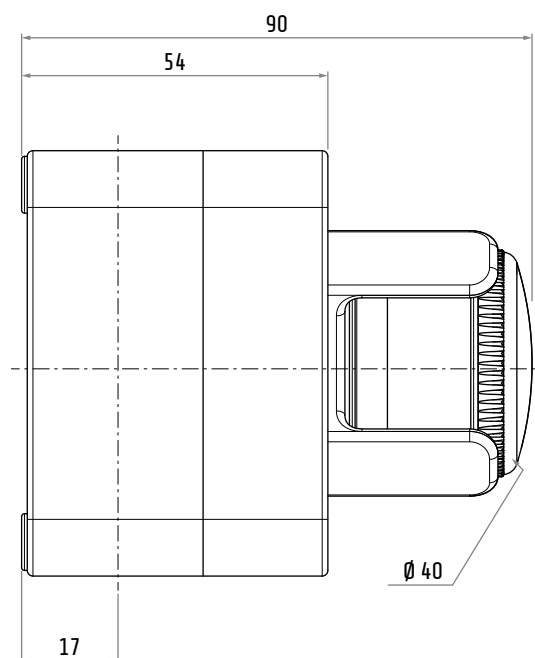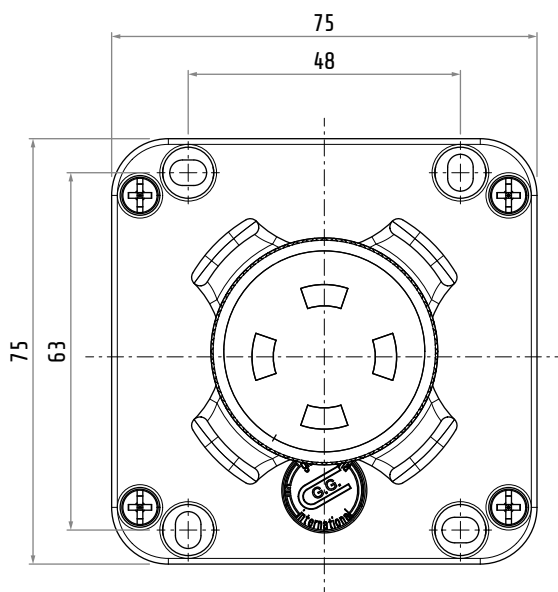

Dimensions in mm / Illustrations NOT in scale