



GM033/FR

**STATION WITH ALARM YELLOW BUTTON, WHITE LED
AND FR SOCKET**

Specifications

Material / color	cover: PC V0 transparent base: ABS V0 black RAL9005
Protection class	IP54
Operating temperature	-25°C ... +70°C
Standards	EN81-20 / EN81-50
Cable gland	M20
Knockout	M20
Light diffusion angle	120°

1 contact block NC (spring contacts)		
Rated insulation voltage	Ui	690 V *
Rated impulse withstand voltage	Uimp	4 kV *
Frequency		50/60 Hz *
Rated thermal current	Ith	16 A *
Rated operating current	Ithe	10 A


Marking

* IMQ approved values

1 LED lamp (spring contacts)		
Power supply		AC/DC 24 V
Marking		

Electronic PCB		
LED color	fixed	white
Rated voltage		12/24 VDC

Socket (France CEE - Type E)	
Protection class	IP54
Electrical characteristics	250 V 16 A
Standards	IEC 309
Marking	CE

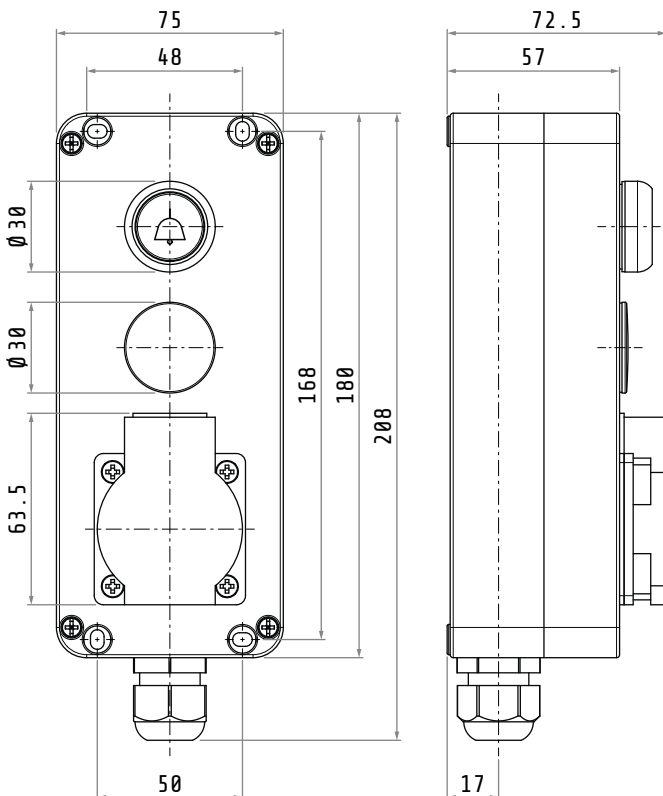

Dimensions in mm / illustrations NOT in scale