



GIOVENZANA
INTERNATIONAL B.V.

Strawinskylaan 1105
1077 XX Amsterdam, The Netherlands



DS-GM730-EN / 12.03.2021


EN
datasheet

GM730

MAINTENANCE BOX


Specifications

Enclosure	
cover	ABS V0 yellow PANTONE 102C
base	ABS V0 black RAL 9005
Protection class	IP54 (IEC/EN 60529)
Wiring	1 × M20/M25 knockout 1 × M20 cable gland
GM750/EU	Schuko socket
GM750/FR	Cenelec socket
GM750/US	USA socket
GM750/SW	Swiss socket
GM750/UK	UK socket
GM750/CH	Australia & China socket

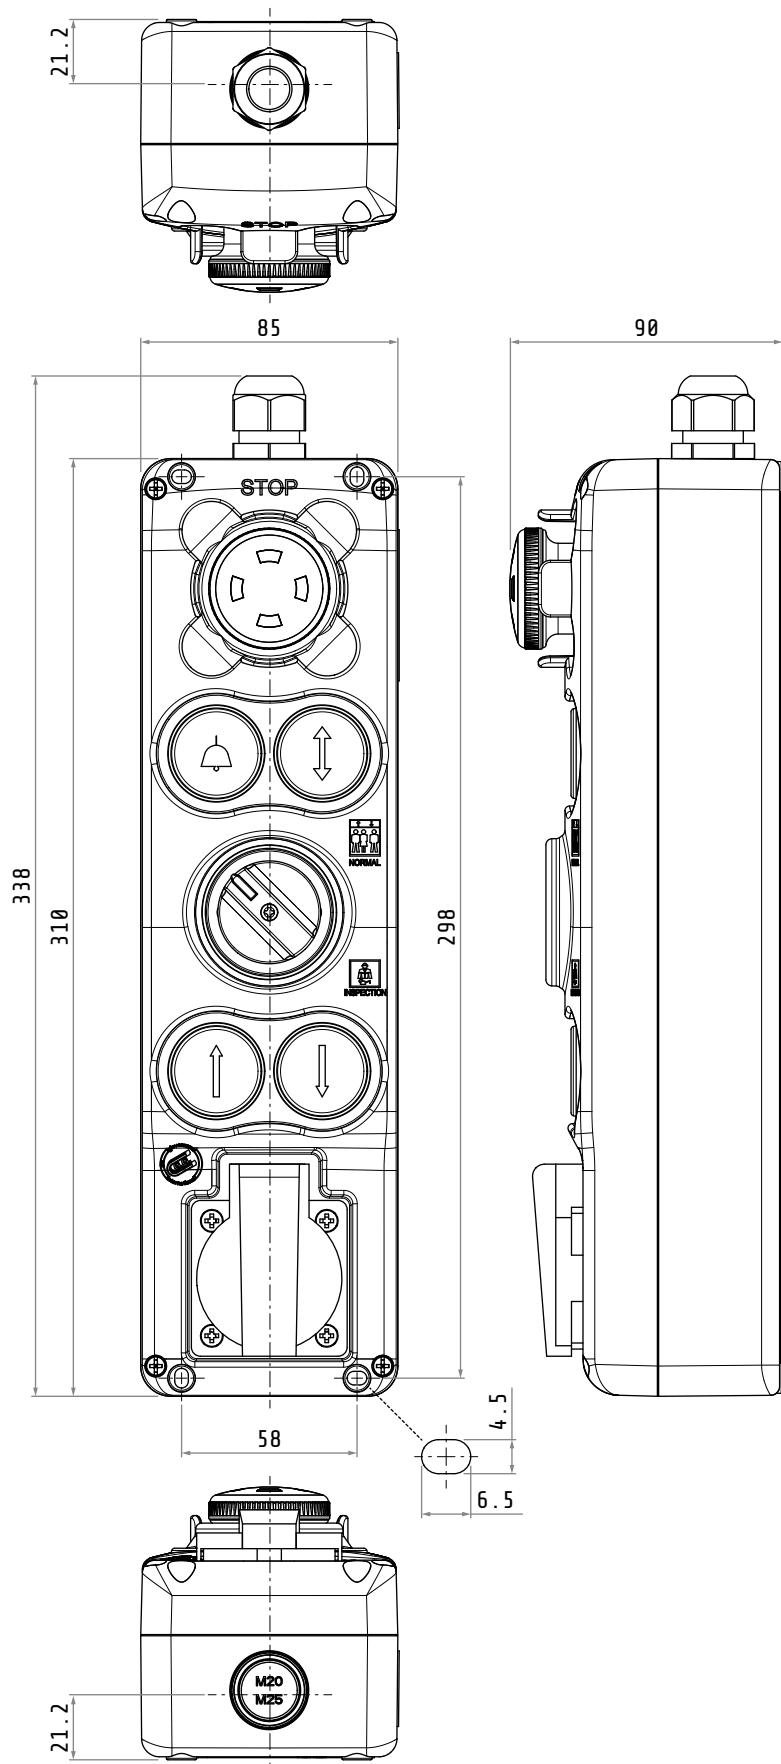

Dimensions in mm / illustrations NOT in scale


Spring clamp terminal (NO)



IEC / EN 60947-5-1 characteristics (IMQ values)

Rated operating voltage [Ue]	690 V
Rated insulation voltage [Ui]	690 V
Rated impulse withstand voltage [Uimp]	4 kV
Rated thermal current [Ith]	16 A
Rated thermal current in enclosure [Ithe]	16 A
Frequency	50/60 Hz

Spring clamp terminal (NC)



IEC / EN 60947-5-1 characteristics (IMQ values)

Rated operating voltage [Ue]	690 V
Rated insulation voltage [Ui]	690 V
Rated impulse withstand voltage [Uimp]	4 kV
Rated thermal current [Ith]	16 A
Rated thermal current in enclosure [Ithe]	16 A
Frequency	50/60 Hz

Cam switch

Rated operating voltage [Ue]	690 V
Rated insulation voltage [Ui]	690 V
Rated impulse withstand voltage [Uimp]	4 kV
Rated thermal current [Ith]	20 A
Rated thermal current in enclosure [Ithe]	16 A
Frequency	50/60 Hz

2	7-8		X
	5-6	X	
1	3-4		X
	1-2	X	
cell	contacts	0	1
		positions	

X - Closed contact