

# GSL...

## SILICONE LED STRIP



GSL30 / GSL60  
Flexible LED strip




GSLC001  
Power connection cable  
(screws not provided,  
1×GSLC004 needed)



GSLC002  
Silicone cap for LED  
strip live end



GSLC003  
Silicone cap for LED  
strip dead end



GSLC004  
Protection and screws  
for connectors



GSLC005  
LED strip tensioners (2 pieces)



GSLC006  
Wall plug




GSLC007  
Sealant (90 ml)



GSLC008  
Power connection kit  
- 1 × power connection cable  
- 1 × silicone cap for  
LED strip live end  
- 1 × silicone cap for  
LED strip dead end  
- 1 × protection and screws  
for connectors  
- 1 × sealant (5 ml)



GSLC009  
Connection cable  
(screws not provided,  
2 × GSLC004 needed)



GSLC010  
Bridge connector  
(screws not provided,  
2×GSLC004 needed)



GSLC011  
"T" shaped connector  
(screws not provided,  
3×GSLC004 needed)




GSLC012  
Cross shaped connector  
(screws not provided,  
4×GSLC004 needed)

## GSL30 / GSL60

Voltage	230 V ac $\pm 15\%$	
Power	5 W/m	GSL30
	6.4 W/m	GSL60
Flux	450 lm/m	GSL30
	600 lm/m	GSL60
Protection	IP65 *	
Operating temperature	-40 ... +70°C	
Flame retardant class	UL94	V1
UV class	UL94	F1
Dimmable & flickerless with	PF > 0.85	
Beam angle	120°	
Color	pure white 6000-6500K	
Shaft area	EN-81	3.5 m <sup>2</sup> GSL30
		9.2 m <sup>2</sup> GSL60
Maximum powered length	150 m	
Cutting points distance	1.5 m	
Operating life	5000 hours (max 4 hours per cycle)	

\* With accessories GSLC002, GSLC003 and GSLC004.

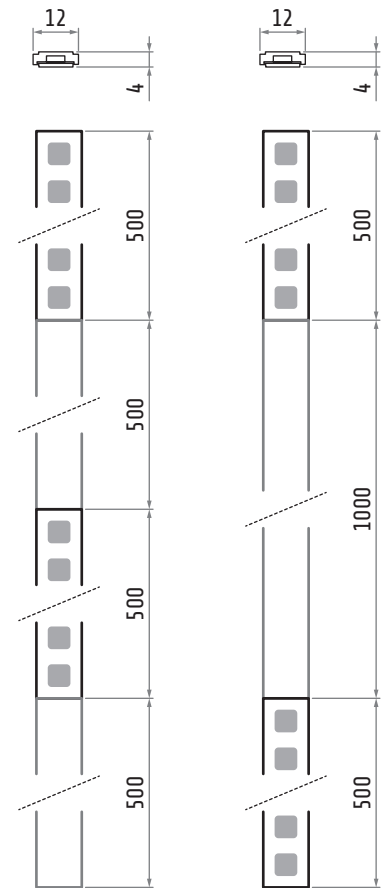


GSL30

GSL60



## GSLC001 / GSLC009 / GSLC010 / GSLC011 / GSLC012

Voltage	240 V ac	
Current	max	6 A
Protection	IP65 *	
Operating temperature	-40 ... +70°C	


\* With accessories GSLC002 and GSLC004

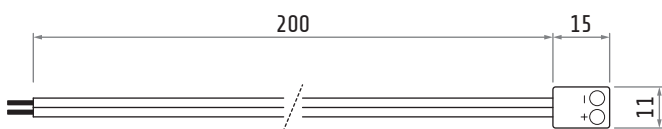


GSLC001





GSLC010



GSLC011

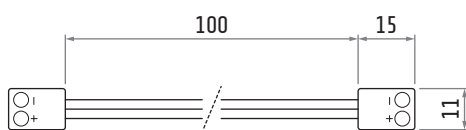

GSLC009



GSLC012

