GIOVENZANA
INTERNATIONAL B.V.

Strawinskylaan 1105
1077 XX Amsterdam, The Netherlands

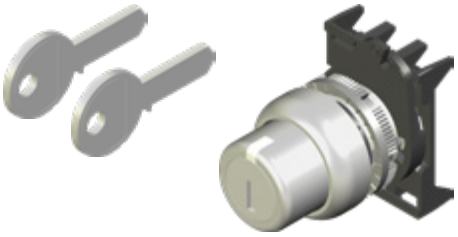

PSCR8...GL4X

PSCR8...GL4X

NEMA SERIES ROTARY SWITCH WITH KEY

Series	NEMA
Type	rotary switch
Operator	key
Fixing	Ø22
Panel thickness	1 ... 6 mm
Drilling template compliance	IEC/EN60947-5-1 CENELEC EN50007
Mechanical life	1×10^6 operations
NEMA rating	4-4X
Material	thermoplastic
Marking	CE, UL, UKCA



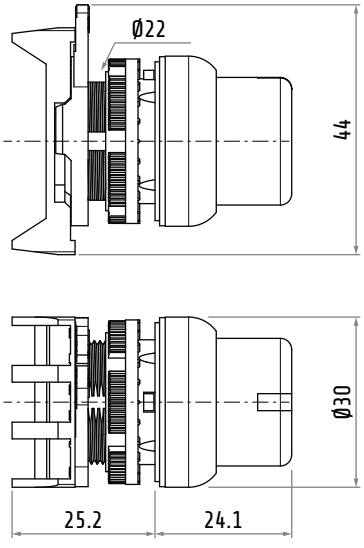

Dimensions in mm / Illustrations NOT in scale

Giovenzana International B.V. reserves the right to change the features and data shown in this document at any time and without notice.
This document cannot therefore be considered a contract with third parties.



Key extraction			
SX	0	DX	
	●		PSCR8D0CGL4X
		●	PSCR8D0EGL4X
	●	●	PSCR8D0NGL4X



Key extraction			
SX	0	DX	
	●		PSCR8TOCGL4X
●			PSCR8TOAGL4X
		●	PSCR8TOEGL4X
●	●	●	PSCR8TOGGL4X
●	●		PSCR8TOHGL4X
●		●	PSCR8TOKGL4X
	●	●	PSCR8TONGL4X



Key extraction			
SX	0	DX	
	●		PSCR8SDCGL4X
●			PSCR8SDEGL4X
●	●		PSCR8SDNGL4X



Key extraction			
SX	0	DX	
	●		PSCR8T3CGL4X



Key extraction			
SX	0	DX	
	●		PSCR8D1CGL4X
		●	PSCR8D1EGL4X
	●	●	PSCR8D1NGL4X



Key extraction			
SX	0	DX	
	●		PSCR8T2CGL4X
		●	PSCR8T2AGL4X
	●	●	PSCR8T2HGL4X



Key extraction			
SX	0	DX	
	●		PSCR8D2CGL4X



Key extraction			
SX	0	DX	
	●		PSCR8T1CGL4X
●			PSCR8T1EGL4X
●	●		PSCR8T1NGL4X