





PSMB1...GL4X



PSMB2...GL4X



PSMB3...GL4X



PSMB4...GL4X



PSMB5...GL4X



PSMB8...GL4X




Central contact version available (PSMCx...GL4X)

# PSMB...GL4X


## NEMA SERIES ROTARY SWITCH WITH STANDARD OPERATOR

Series	NEMA
Type	rotary switch
Operator	standard
Fixing	Ø22
Panel thickness	1 ... 6 mm
Drilling template compliance	IEC/EN60947-5-1 CENELEC EN50007
Mechanical life	1×10 <sup>6</sup> operations
NEMA rating	4-4X
Material	thermoplastic
Marking	CE, UL, UKCA


Code	Colour
PSMB1...GL4X	red
PSMB2...GL4X	green
PSMB3...GL4X	yellow
PSMB4...GL4X	blue
PSMB5...GL4X	white
PSMB8...GL4X	black

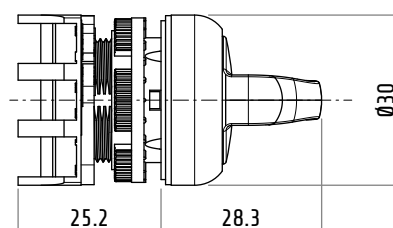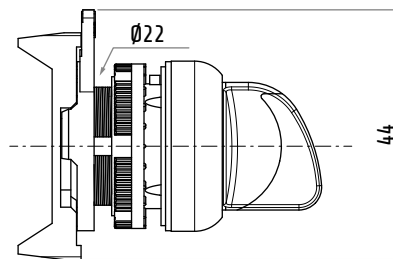


Dimensions in mm / Illustrations NOT in scale




PSMB1D0GL4X	red
PSMB2D0GL4X	green
PSMB3D0GL4X	yellow
PSMB4D0GL4X	blue
PSMB5D0GL4X	white
PSMB8D0GL4X	black




PSMB1T0GL4X	red
PSMB2T0GL4X	green
PSMB3T0GL4X	yellow
PSMB4T0GL4X	blue
PSMB5T0GL4X	white
PSMB8T0GL4X	black




PSMB1SDGL4X	red
PSMB2SDGL4X	green
PSMB3SDGL4X	yellow
PSMB4SDGL4X	blue
PSMB5SDGL4X	white
PSMB8SDGL4X	black




PSMB1T3GL4X	red
PSMB2T3GL4X	green
PSMB3T3GL4X	yellow
PSMB4T3GL4X	blue
PSMB5T3GL4X	white
PSMB8T3GL4X	black



PSMB1D2GL4X	red
PSMB2D2GL4X	green
PSMB3D2GL4X	yellow
PSMB4D2GL4X	blue
PSMB5D2GL4X	white
PSMB8D2GL4X	black



PSMB1T2GL4X	red
PSMB2T2GL4X	green
PSMB3T2GL4X	yellow
PSMB4T2GL4X	blue
PSMB5T2GL4X	white
PSMB8T2GL4X	black



PSMB1T1GL4X	red
PSMB2T1GL4X	green
PSMB3T1GL4X	yellow
PSMB4T1GL4X	blue
PSMB5T1GL4X	white
PSMB8T1GL4X	black