

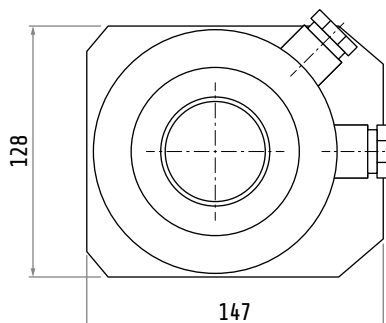


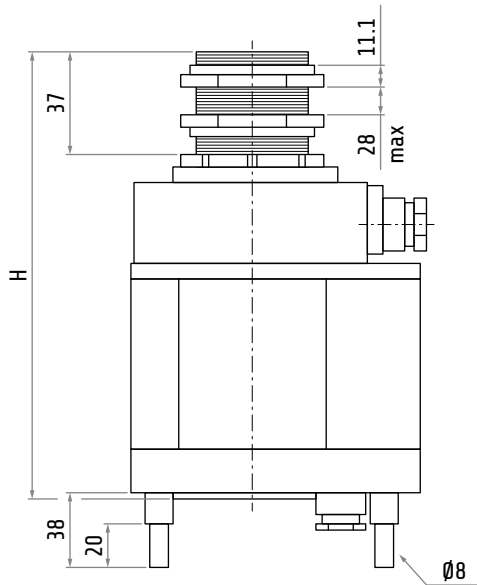

SCUDO

SLIP RINGS ROTATING COLLECTORS

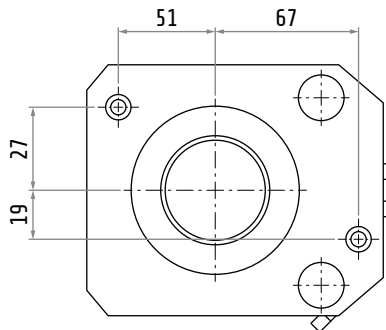

Rated current	Ith	20 A
Intermittent operating current		30 A
Operating voltage	max max	500 V AC 220 V DC
Testing voltage		2500 V AC
Rotation speed	max	20 rev/min
Mechanical life		1 million revs
Protection degree	IEC144	IP51
Ambient temperature		-30°C ... +60°C

Code	Rings	Height (H)
30402091	3	180 mm
30402092	4	195 mm
30402093	5	210 mm
30402094	6	225 mm
30402095	7	240 mm
30402096	8	255 mm
30402097	9	270 mm
30402098	10	285 mm
30402099	11	300 mm
30402100	12	315 mm
30402101	13	330 mm
30402102	14	345 mm
30402103	15	360 mm